


**STANDARD ARRIVAL CHART  
INSTRUMENT (STAR)**  
RNAV1(GNSS)  
SURVEILLANCE REQUIRED

**TRANSITION ALT  
5000**

TWR(RWY09)	118.750	APP(FD)	124.200
TWR(RWY10)	118.100	ACC(E)	120.900
TWR(RWY11L)	123.825	ACC(S)	125.700
TWR(RWY11R)	125.850	ACC(SW)	132.150
APP(ARR1)	126.350	ACC(W)	124.550
APP(ARR2)	125.675		

SARSAWA	123.500
AMBALA	122.700/ 119.500

**DELHI (VIDP)  
INDIA**  
ELKUX 6E,SP 6E - RWY09  
ELKUX 6F,SP 6F - RWY10  
ELKUX 6G,SP 6G - RWY11L  
ELKUX 6H,SP 6H - RWY11R

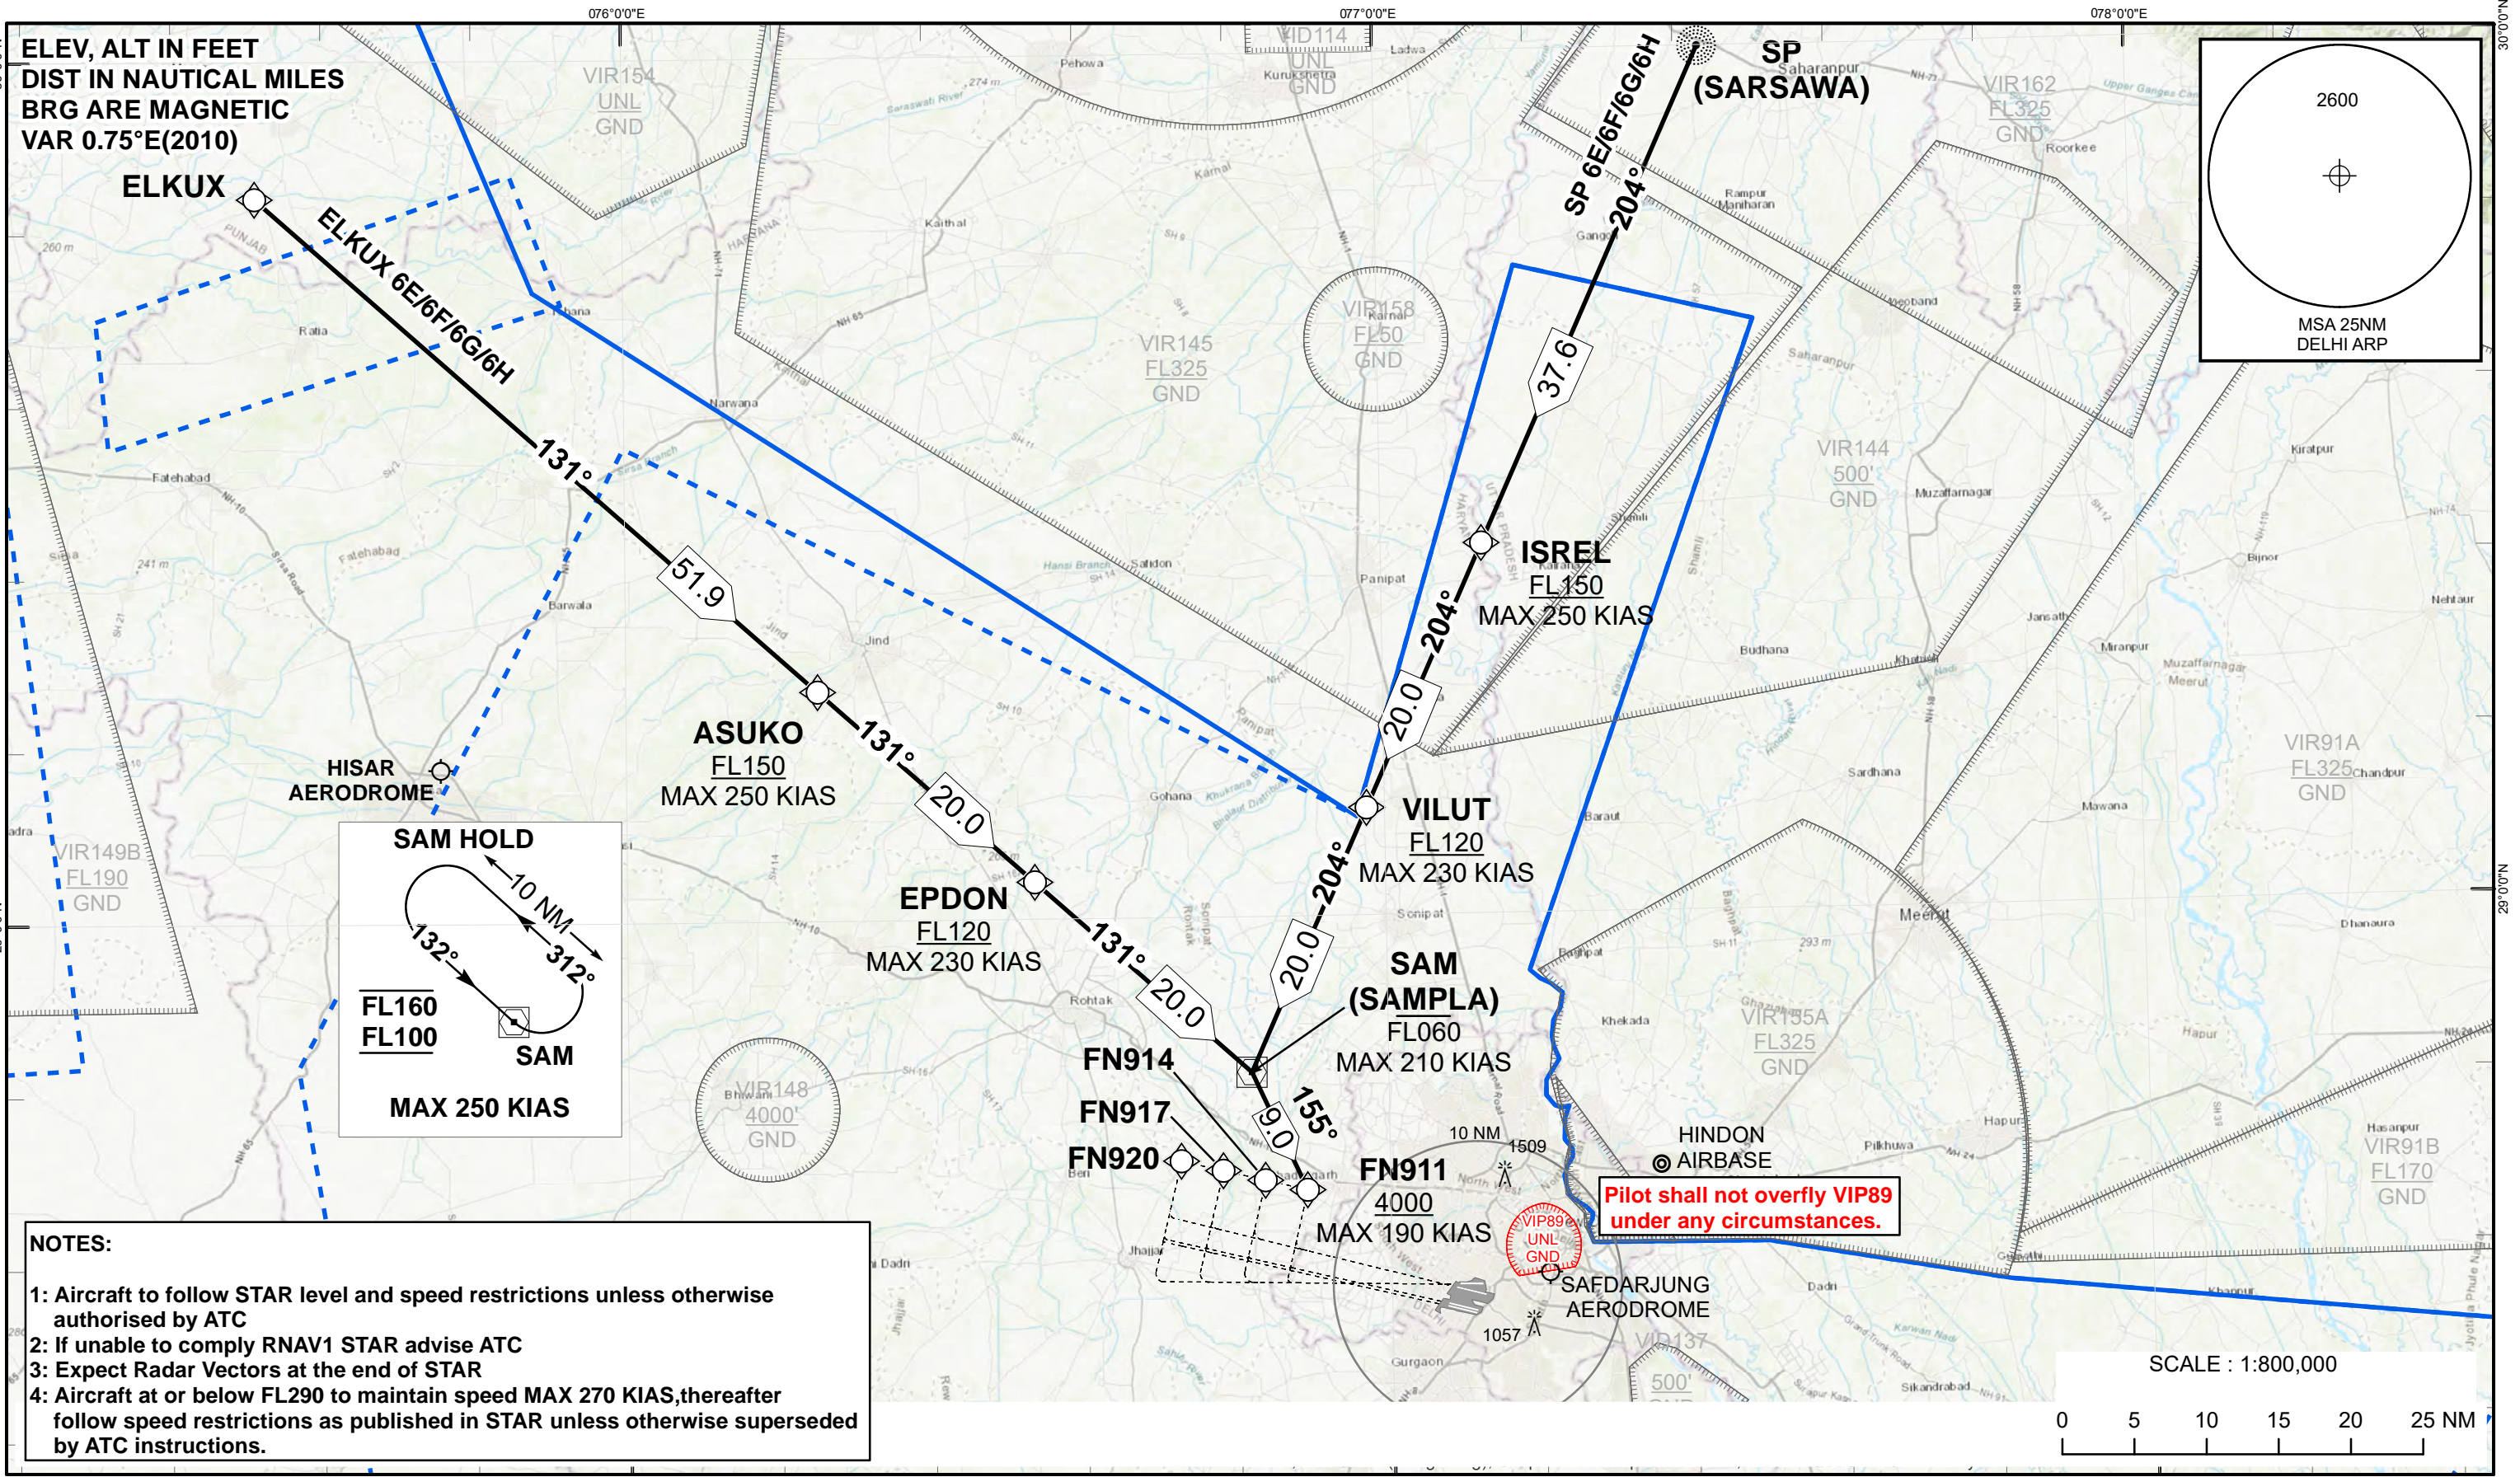

**NOTES:**

- 1: Aircraft to follow STAR level and speed restrictions unless otherwise authorised by ATC
- 2: If unable to comply RNAV1 STAR advise ATC
- 3: Expect Radar Vectors at the end of STAR
- 4: Aircraft at or below FL290 to maintain speed MAX 270 KIAS,thereafter follow speed restrictions as published in STAR unless otherwise superseded by ATC instructions.