
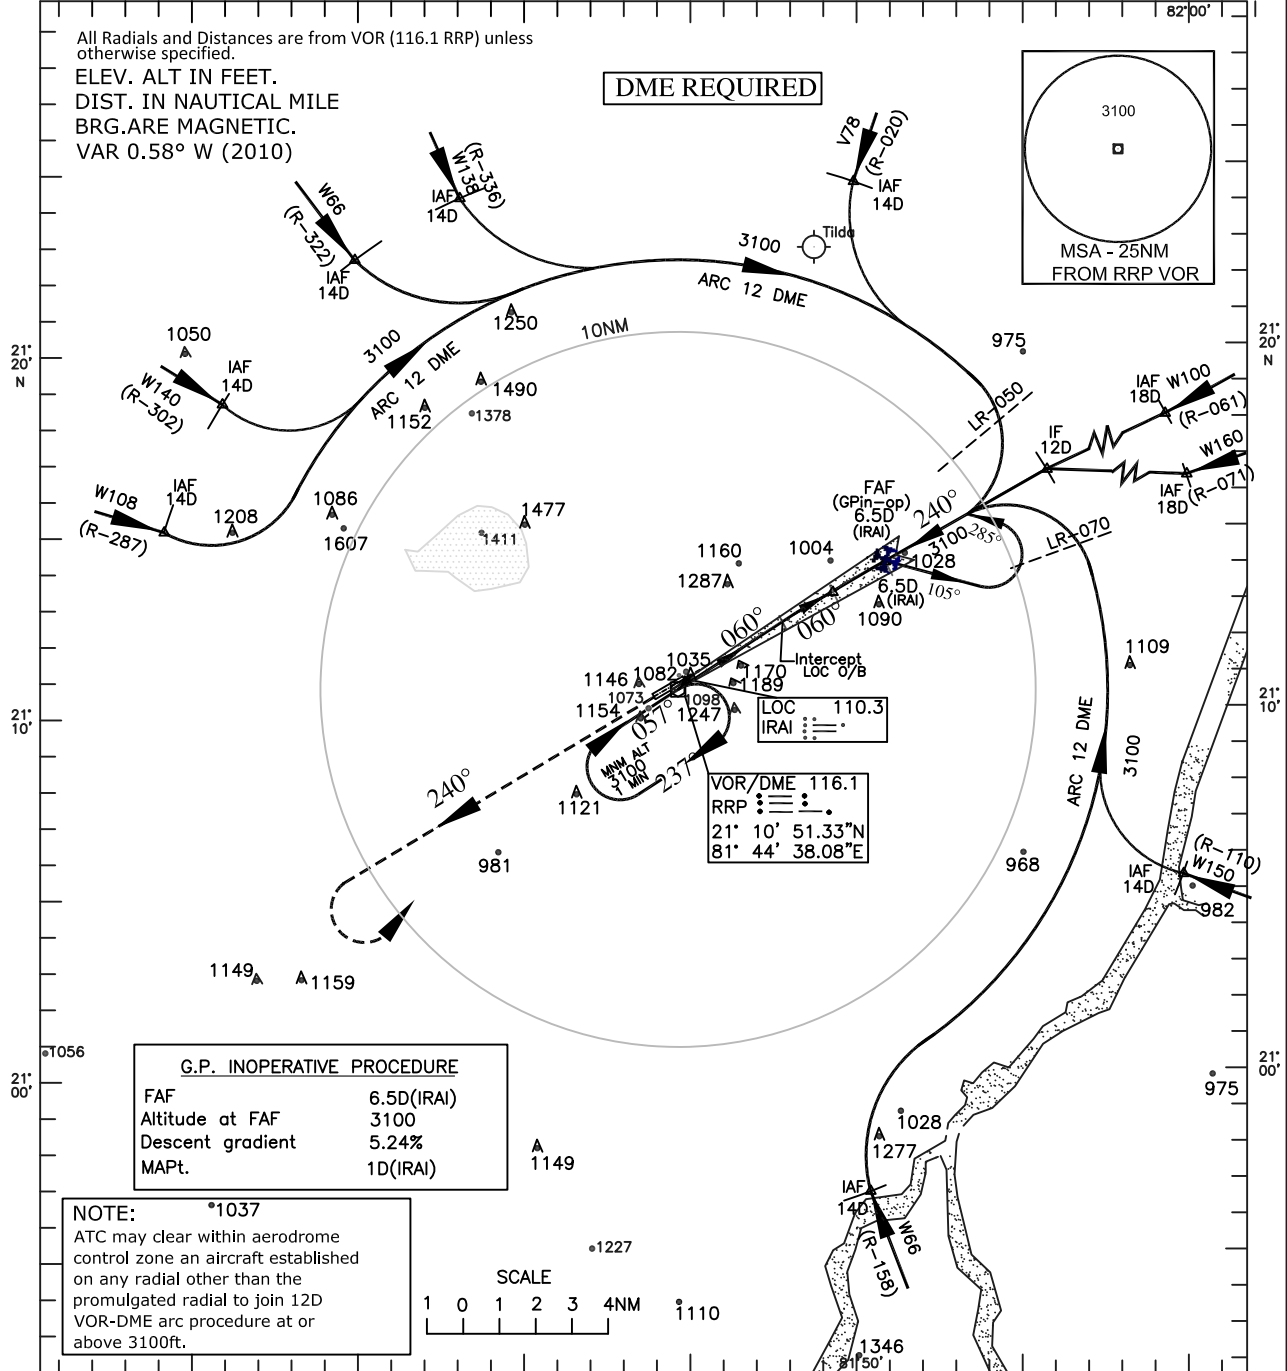


INSTRUMENT APPROACH CHART  
 AERODROME ELEV 1044ft.  
 HEIGHTS RELATED TO THR RWY 24-ELEV 1036ft  
 RAIPUR(VERP) INDIA ILS RWY 24 (Cat.A/B&C)  
 TWR.124.75  
 81°30'E 81°40' 81°50' 82°00'

All Radials and Distances are from VOR (116.1 RRP) unless otherwise specified.  
 ELEV. ALT IN FEET.  
 DIST. IN NAUTICAL MILE  
 BRG. ARE MAGNETIC.  
 VAR 0.58° W (2010)

DME REQUIRED



G.P. INOPERATIVE PROCEDURE


FAF	6.5D(IRAI)
Altitude at FAF	3100
Descent gradient	5.24%
MAPt.	1D(IRAI)

Transition Altitude 5000

MISSED APPROACH

Climb straight ahead to 3100ft., then turn LEFT to join VOR (116.1 RRP) holding or as instructed by ATC.

ILS RDH 50

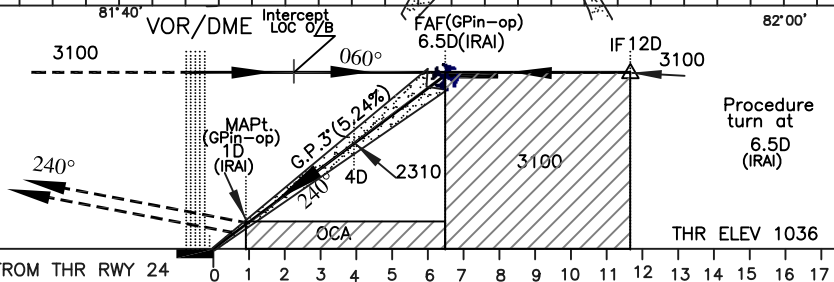

O C A (H)			Distance (IRAI)/Altitude information for G.P.inoperative procedure						
CAT. OF AIRCRAFT	A/B	C	Distance(NM)	6.5D(FAF)	6D	5D	4D	3D	2D
STRAIGHT-IN	1260 (224)	1260 (224)	Altitude (ft.)	3100	2950	2630	2310	2000	1680
VISUAL CIRCLING	1550 (506)	1690 (646)	Time and Rate of Descent information (G.P.in-op. procedure)						
G.P.inoperative procedure			Ground speed (kt.)		80	100	120	140	160
STRAIGHT-IN	1440 (404)	1440 (404)	Rate of descent (ft/min)		425	530	635	745	850
VISUAL CIRCLING	1550 (506)	1690 (646)							

DRG. NO. AAI/15-IALC/18/25-03-2022