

| | | |
|---|---|---|
| TEL: +91-11-24632950 Extn: 2219/2233 AFS: VIDDYXAX FAX: +91-11-24615508 Email: gmais@aai.aero | INDIA AERONAUTICAL INFORMATION SERVICE AIRPORTS AUTHORITY OF INDIA RAJIV GANDHI BHAVAN SAFDARJUNG AIRPORT NEW DELHI – 110003 | 119/2026 12 JUN 2026 |
|---|---|---|

File No. ATM-19013(19)/1/2026-ATM

Following supplement is issued for information, guidance and necessary action.

sd/-

विपिन कुमार

VIPIN KUMAR

अध्यक्ष/CHAIRMAN

भारतीय विमानपत्तन प्राधिकरण

AIRPORTS AUTHORITY OF INDIA

[EFFECTIVE DATE: 06 AUG 2026]

INSTRUMENT APPROACH CHART – RNP RWY 04 (CAT A/B)
AGATTI AIRPORT, AGATTI (VOAT)

1. Following Instrument Approach Chart is issued for Agatti Airport, Agatti:
 - i. Instrument Approach Chart – RNP RWY 04 (CAT A/B)

AMENDMENT/CANCELLATION

1. **Insert** Instrument Approach Chart – RNP RWY 04 and its associated Tabular Description of this AIP Supplement in VOAT AD 2.24 of eAIP India and amend list of charts accordingly.

**INSTRUMENT
APPROACH
CHART**

AERODROME ELEV 12 ft
HEIGHTS RELATED TO
THR RWY 04 - ELEV 10 ft

TWR 122.300/118.700

AGATTI(VOAT)
INDIA
RNP RWY 04
(CAT A/B)


072°0'E

072°10'E


ELEV, ALT IN FEET
DIST IN NAUTICAL MILES
BRG ARE MAGNETIC
VAR 2.13° W (2010)

RNP APCH

Baro-VNAV not authorized
below 10°C & above 45°C




CAUTION:
Non-instrument runway, approach
below 1000ft above threshold
elevation shall be conducted in VMC

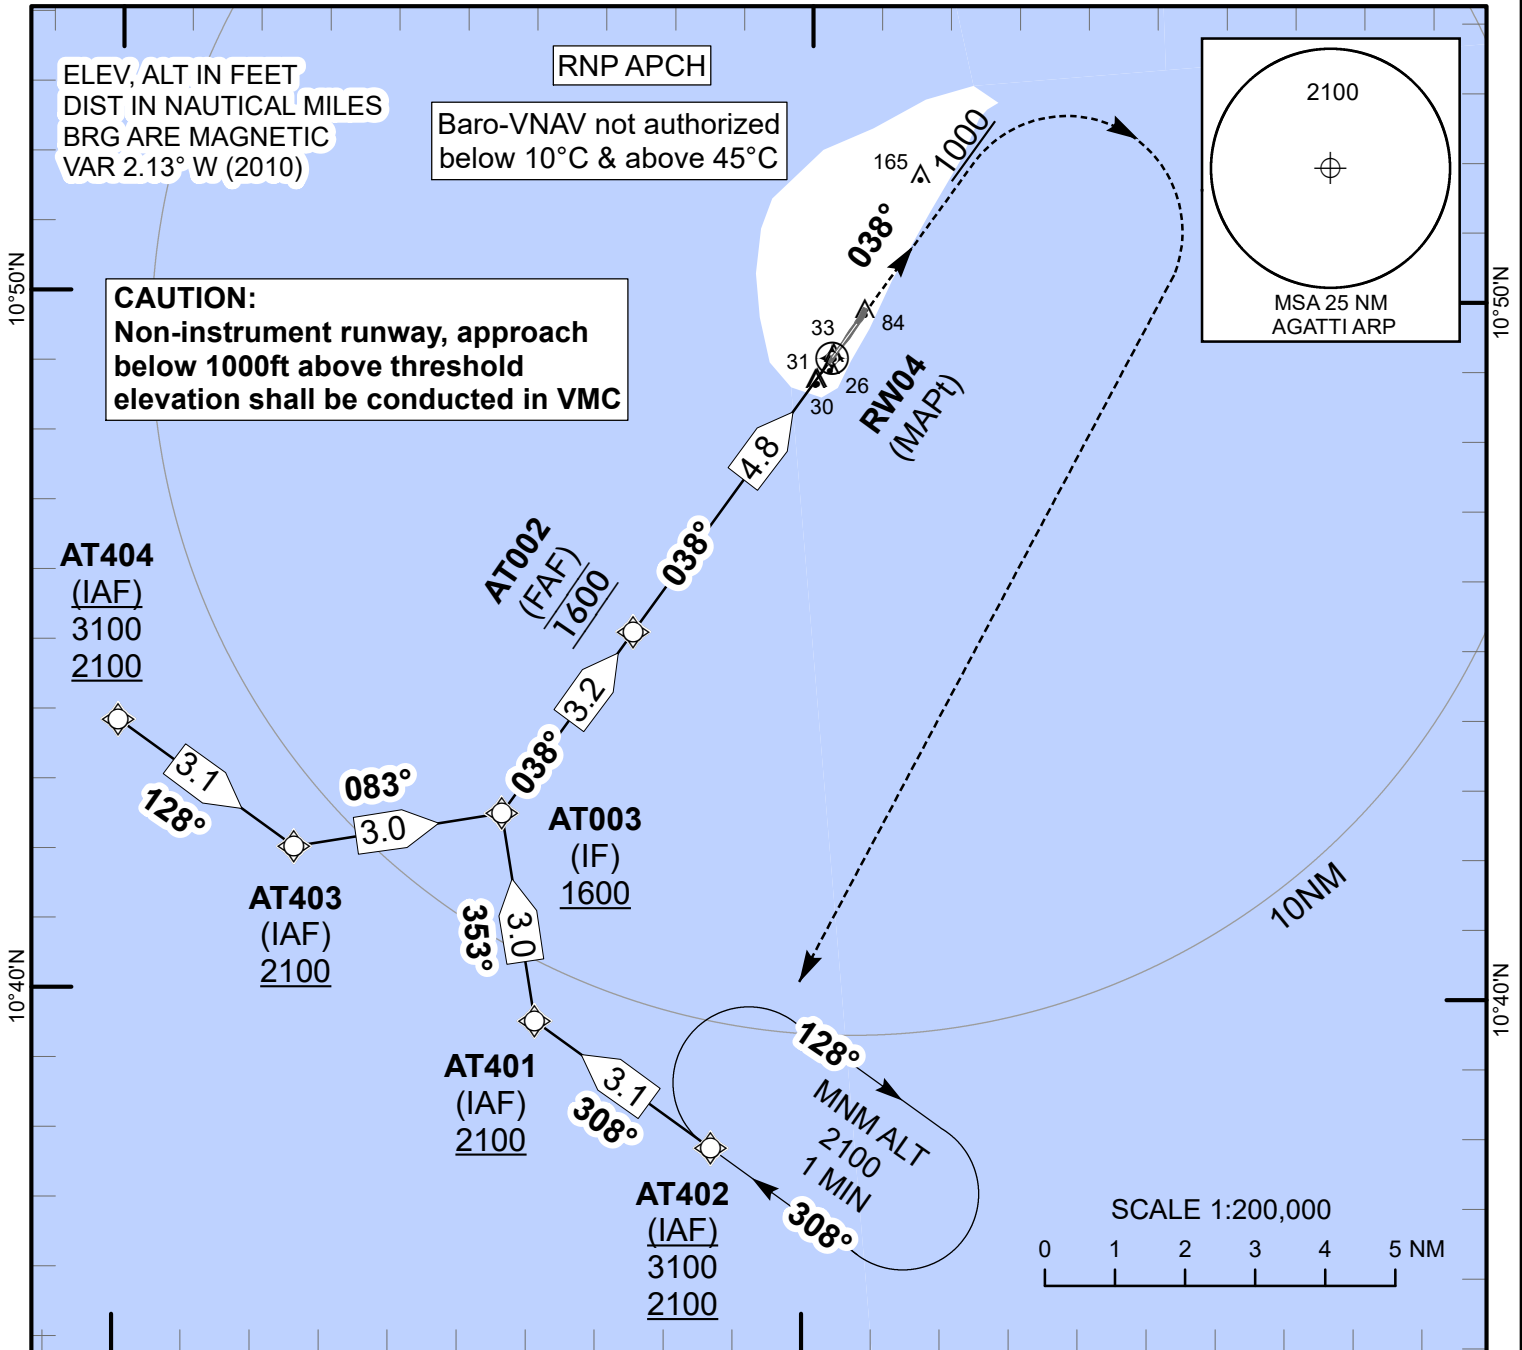

072°0'E

072°10'E

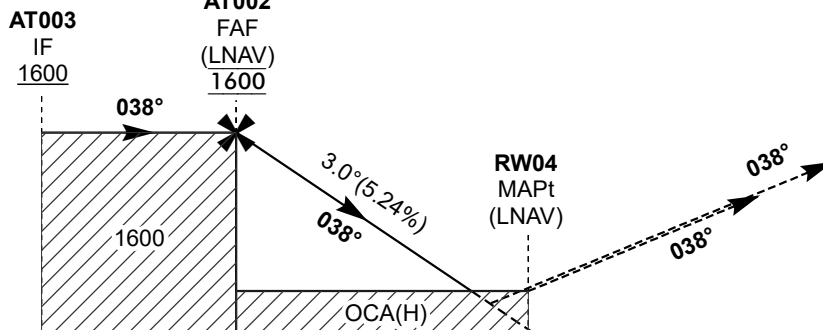

Transition Altitude 4000

MISSED APPROACH

Climb Straight passing 1000 ft,
climbing turn RIGHT, proceed direct
to AT402 and join hold at 2100ft or as
instructed by ATC.

TCH 50

THR ELEV 10

| OCA(H) | | NAUTICAL MILES FROM THR RWY 04 | | | | | | | |
|---------------|----------|--------------------------------|--|--------|----------|------|------|-----|-----|
| Acft Category | A | B | Distance to RW04 | NM | 4.8(FAF) | 4 | 3 | 2 | 1 |
| LNAV/VNAV | 261(251) | | Altitude | Ft | 1600 | 1340 | 1020 | 700 | 380 |
| | | | Rate of Descent/Ground Speed Information | | | | | | |
| | | | Ground Speed | Kt | 80 | 100 | 120 | 140 | |
| | | | Rate of Descent (5.24%) | Ft/Min | 425 | 530 | 635 | 745 | |

DRG.NO. AAI/76-IALC/160424/09/06/2026

TABULAR DESCRIPTION RNP RWY 04 VOAT CAT A/B:-

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Distance/ Time | Turn Direction | Altitude | Speed Limit | VPA/TCH | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------------------|----------------|----------------|-----------------------|-------------|----------|--------------------------|
| | | | | | NM/Min | | (ft) | (Kt) | | |
| 10 | IF | AT402 | | | | | -3100.00/ +2100.00 | | | RNP APCH |
| 20 | TF | AT401 | | 307.57° Mag / 305.43° True | 3.10 | | +2100.0 | | | RNP APCH |
| 30 | TF | AT003 | | 352.56° Mag / 350.43° True | 3.00 | | +1600.00 | | | RNP APCH |
| 10 | IF | AT404 | | | | | -3100.00/ +2100.00 | | | RNP APCH |
| 20 | TF | AT403 | | 127.54° Mag / 125.41° True | 3.10 | | +2100.00 | | | RNP APCH |
| 30 | TF | AT003 | | 82.55° Mag / 80.41° True | 3.00 | | +1600.00 | | | RNP APCH |
| 10 | IF | AT003 | | | | | +1600.00 | | | RNP APCH |
| 20 | TF | AT002 | | 37.55° Mag / 35.42° True | 3.20 | | @1600.00 | | | RNP APCH |
| 30 | TF | RW04 | Y | 37.56° Mag / 35.43° True | 4.83 | | @60.50 | | -3.00/50 | RNP APCH |
| 40 | CA | | | 37.57° Mag / 35.44° True | | | +1000.00 | | | RNP APCH |
| 50 | DF | AT402 | | | | R | +2100.00 | | | RNP APCH |
| 60 | HM | AT402 | Y | 307.57° Mag / 305.43° True | 1 MIN | R | +2100.00 | -170.00 | | RNP APCH |

WAYPOINT LIST :-

| Waypoint Identifier | Coordinates |
|---------------------|----------------------------|
| RW04 | N 10:49:07.91E 72:10:19.59 |
| AT402 | N 10:37:46.68E 72:08:40.00 |
| AT401 | N 10:39:35.00E 72:06:06.08 |
| AT003 | N 10:42:33.31E 72:05:35.67 |
| AT002 | N 10:45:10.49E 72:07:28.72 |
| AT404 | N 10:43:51.48E 72:00:01.39 |
| AT403 | N 10:42:03.21E 72:02:35.38 |