

TEL: +91-11-24632950 Extn: 2219/2233 AFS: VIDDYXAX FAX: +91-11-24615508 Email: gmais@aai.aero	INDIA AERONAUTICAL INFORMATION SERVICE AIRPORTS AUTHORITY OF INDIA RAJIV GANDHI BHAVAN SAFDARJUNG AIRPORT NEW DELHI – 110003	150/2026 23 JUL 2026
---	---	--

File No. ATM-19013(19)/1/2026-ATM

Following supplement is issued for information, guidance and necessary action.

sd/-

विपिन कुमार

VIPIN KUMAR

अध्यक्ष/CHAIRMAN

भारतीय विमानपत्तन प्राधिकरण

AIRPORTS AUTHORITY OF INDIA

[VALIDITY: 03 SEP 2026 TO 02 DEC 2026]

TRIAL OPERATIONS

RNAV 1 POINT MERGE SYSTEM - STARS RWY 27R / 27L **KEMPEGOWDA INTERNATIONAL AIRPORT** **BENGALURU (VOBL)**

1. Following Instrument Flight procedures are issued for Kempegowda International Airport, Bengaluru:
 - i) Instrument Flight Procedure Charts - RNAV 1 Point Merge System STARS RWY 27L and RWY 27R
 - ii) Tabular Description - RNAV 1 Point Merge System STARS RWY 27L and RWY 27R
2. Trial operations to be conducted:
 - i) In light to moderate traffic density under supervision of ATC Watch Supervisory Officer (WSO).
 - ii) Under fair weather conditions.
3. Regular feedback will be collected during trial operations.

**STANDARD ARRIVAL CHART
INSTRUMENT (STAR)**

**RNAV1(GNSS)
SURVEILLANCE REQUIRED**


**TRANSITION ALT
7000**

APP ARR 121.250
APP 127.750
TWR 124.350
119.050

BENGALURU (VOBL)

RWY 27L/27R

ADKAL 7P, GUNIM 7P, GUNIM 7Q, LEKAP 7P,
PEXEG 7P, PEXEG 7Q, RIKBU 7P, SUSIK 7P,
SUSIK 7Q, TELUV 7P, UGABA 7P

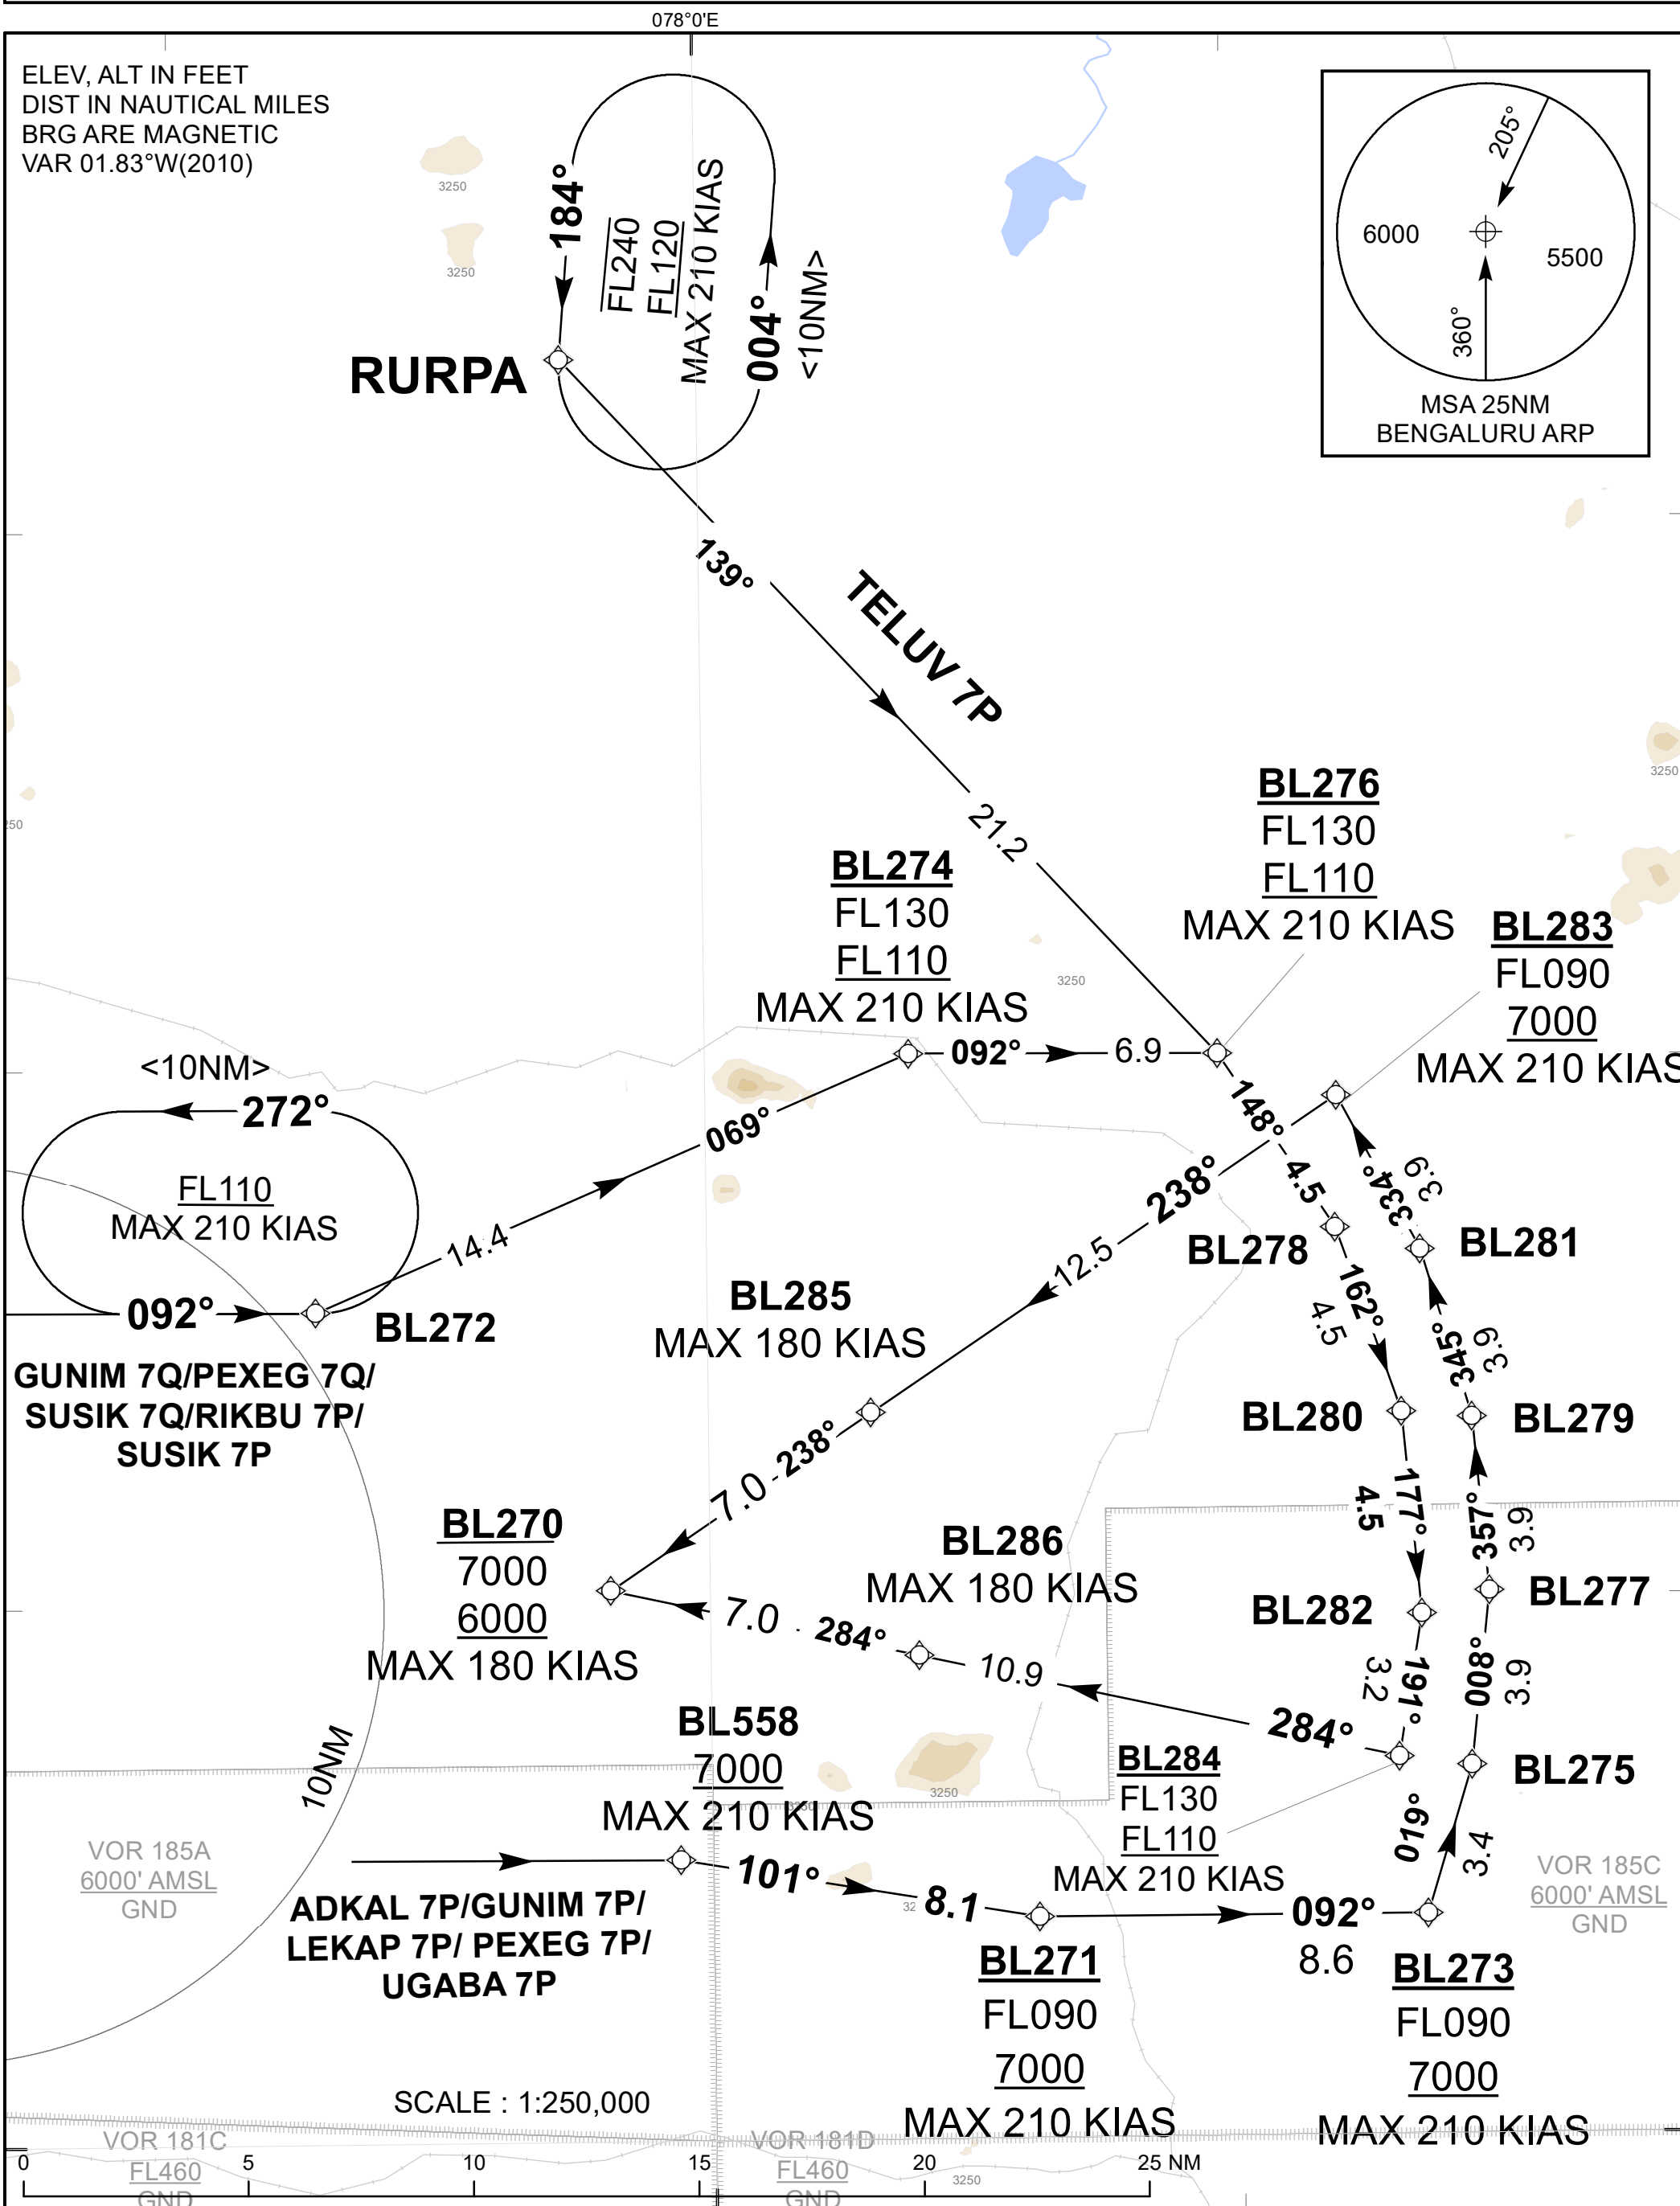


DRG.NO. AAI/37-IALC/090125/27/03/2025

**RNAV1(GNSS)
SURVEILLANCE REQUIRED**

APP ARR	121.250
APP	127.750
TWR	124.350
	119.050

RWY 27L/27R

**ADKAL 7P, GUNIM 7P, GUNIM 7Q, LEKAP 7P,
PEXEG 7P, PEXEG 7Q, RIKBU 7P, SUSIK 7P,
SUSIK 7Q, TELUV 7P, UGABA 7P,XIVIL7P**



TABULAR DESCRIPTION POINT MERGE SYSTEM STAR RWY 27L/27R (VOBL)

TELUV 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
TELUV	IF		-		-	-	-	-		RNAV 1
RURPA	TF		206.87° (205.04°)		-FL130	-	-210.00	32.92		RNAV 1
BL276	TF		138.98° (137.15°)		-FL130	+FL110	-210.00	21.22		RNAV 1
BL278	TF		148.17° (146.34°)		-FL130	+FL110	-210.00	4.50		RNAV 1
BL280	TF		162.46° (160.63°)		-FL130	+FL110	-210.00	4.50		RNAV 1
BL282	TF		176.87° (175.04°)		-FL130	+FL110	-210.00	4.50		RNAV 1
BL284	TF		191.23° (189.40°)		-FL130	+FL110	-210.00	3.20		RNAV 1
BL286	TF		284.34° (282.50°)				-180.00	10.89		RNAV 1
BL270	TF		284.34° (282.50°)		-7000	+6000	-180.00	7.00		RNAV 1

LEKAP 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
LEKAP	IF		-		-	-	-	-	-	RNAV 1
BL809	TF		296.39° (294.56°)		-	-	-	91.27	-	RNAV 1
GURBI	TF		296.32° (294.49°)		-FL090	-	-210.00	20.36	-	RNAV 1
BL557	TF		0.02° (358.19°)		-	-		14.35	-	RNAV 1
BL558	TF		92.21° (90.38°)		-	+7000.00	-210.00	7.31	-	RNAV 1
BL271	TF		101.42° (99.59°)		-FL090	+7000.00	-210.00	8.06		RNAV 1
BL273	TF		91.91° (90.08°)		-FL090	+7000.00	-210.00	8.62		RNAV 1
BL275	TF		18.97° (17.13°)		-FL090	+7000.00	-210.00	3.44		RNAV 1
BL277	TF		8.19° (6.36°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL279	TF		356.76° (354.93°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL281	TF		345.33° (343.50°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL283	TF		333.90° (332.06°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL285	TF		238.17° (236.34°)				-180.00	12.50		RNAV 1
BL270	TF		238.17° (236.34°)		-7000	+6000	-180.00	7.00		RNAV 1

ADKAL 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
ADKAL	IF		-		-		-	-	-	RNAV 1
BL810	TF		340.20° (338.37°)		-	-	-	47.46	-	RNAV 1
GURBI	TF		340.17° (338.34°)		-FL090	-	-210.00	17.87	-	RNAV 1
BL557	TF		0.02° (358.19°)		-	-	-	14.35	-	RNAV 1
BL558	TF		92.21° (90.38°)		-	+7000.00	-210.00	7.31	-	RNAV 1
BL271	TF		101.42° (99.59°)		-FL090	+7000.00	-210.00	8.06		RNAV 1
BL273	TF		91.91° (90.08°)		-FL090	+7000.00	-210.00	8.62		RNAV 1
BL275	TF		18.97° (17.13°)		-FL090	+7000.00	-210.00	3.44		RNAV 1
BL277	TF		8.19° (6.36°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL279	TF		356.76° (354.93°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL281	TF		345.33° (343.50°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL283	TF		333.90° (332.06°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL285	TF		238.17° (236.34°)				-180.00	12.50		RNAV 1
BL270	TF		238.17° (236.34°)		-7000	+6000	-180.00	7.00		RNAV 1

UGABA 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
UGABA	IF		-		-	-	-	-	-	RNAV 1
MUGPA	TF		24.09° (22.25°)		-	-	-	28.21	-	RNAV 1
RUBOX	TF		24.11° (22.28°)		-	-	-	20.01	-	RNAV 1
BL556	TF		24.17° (22.34°)		-	+FL120	-210.00	13.53	-	RNAV 1
BL557	TF		92.26° (90.42°)		-	-	-	10.09	-	RNAV 1
BL558	TF		92.21° (90.38°)		-	+7000.00	-210.00	7.31	-	RNAV 1
BL271	TF		101.42° (99.59°)		-FL090	+7000.00	-210.00	8.06		RNAV 1
BL273	TF		91.91° (90.08°)		-FL090	+7000.00	-210.00	8.62		RNAV 1
BL275	TF		18.97° (17.13°)		-FL090	+7000.00	-210.00	3.44		RNAV 1
BL277	TF		8.19° (6.36°)		-FL090	+7000.00	-210.00	3.88		RNAV 1

BL279	TF		356.76° (354.93°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL281	TF		345.33° (343.50°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL283	TF		333.90° (332.06°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL285	TF		238.17° (236.34°)				-180.00	12.50		RNAV 1
BL270	TF		238.17° (236.34°)		-7000	+6000	-180.00	7.00		RNAV 1

PEXEG 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
PEXEG	IF		-		-	-	-	-	-	RNAV 1
BL807	TF		87.10° (85.26°)		-	-	-	37.70	-	RNAV 1
ATPUK	TF		87.23° (85.40°)		-	+FL150	-210.00	34.34	-	RNAV 1
BL556	TF		100.68° (98.85°)		-	+FL120	-210.00	25.02	-	RNAV 1
BL557	TF		92.26° (90.42°)		-	-	-	10.09	-	RNAV 1
BL558	TF		92.21° (90.38°)		-	+7000.00	-210.00	7.31	-	RNAV 1
BL271	TF		101.42° (99.59°)		-FL090	+7000.00	-210.00	8.06		RNAV 1
BL273	TF		91.91° (90.08°)		-FL090	+7000.00	-210.00	8.62		RNAV 1
BL275	TF		18.97° (17.13°)		-FL090	+7000.00	-210.00	3.44		RNAV 1
BL277	TF		8.19° (6.36°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL279	TF		356.76° (354.93°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL281	TF		345.33° (343.50°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL283	TF		333.90° (332.06°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL285	TF		238.17° (236.34°)				-180.00	12.50		RNAV 1
BL270	TF		238.17° (236.34°)		-7000	+6000	-180.00	7.00		RNAV 1

PEXEG 7Q

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
PEXEG	IF		-		-	-	-	-	-	RNAV 1
BL807	TF		87.10° (85.26°)		-	-	-	37.70	-	RNAV 1
ATPUK	TF		87.23° (85.40°)		-	+FL150	-210.00	34.34	-	RNAV 1
DUBEL	TF		68.26° (66.42°)		-	+FL140	-210	20.97	-	RNAV 1
APERU	TF		92.28° (90.45°)		-	-	-	4.64	-	RNAV 1

BL272	TF		92.28° (90.45°)			+FL110	-210	10.28		RNAV 1
BL274	TF		68.79° (66.96°)		-FL130	+FL110	-210	14.36		RNAV 1
BL276	TF		92.42° (90.59°)		-FL130	+FL110	-210	6.86		RNAV 1
BL278	TF		148.17° (146.34°)		-FL130	+FL110	-210	4.50		RNAV 1
BL280	TF		162.46° (160.63°)		-FL130	+FL110	-210	4.50		RNAV 1
BL282	TF		176.87° (175.04°)		-FL130	+FL110	-210	4.50		RNAV 1
BL284	TF		191.23° (189.40°)		-FL130	+FL110	-210	3.20		RNAV 1
BL286	TF		284.34° (282.50°)				-180.00	10.89		RNAV 1
BL270	TF		284.34° (282.50°)		-7000	+6000	-180.00	7.00		RNAV 1

GUNIM 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
GUNIM	IF		-		-	-	-	-	-	RNAV 1
OLNUR	TF		120.14° (118.31°)		-	-	-	38.06	-	RNAV 1
BL806	TF		120.28° (118.44°)		-	-	-	40.24	-	RNAV 1
ATPUK	TF		120.40° (118.57°)		-	+FL150	-210.00	36.74	-	RNAV 1
BL556	TF		100.68° (98.85°)		-	+FL120	-210.00	25.02	-	RNAV 1
BL557	TF		92.26° (90.42°)		-	-	-	10.09	-	RNAV 1
BL558	TF		92.21° (90.38°)		-	+7000.00	-210.00	7.31	-	RNAV 1
BL271	TF		101.42° (99.59°)		-FL090	+7000.00	-210.00	8.06		RNAV 1
BL273	TF		91.91° (90.08°)		-FL090	+7000.00	-210.00	8.62		RNAV 1
BL275	TF		18.97° (17.13°)		-FL090	+7000.00	-210.00	3.44		RNAV 1
BL277	TF		8.19° (6.36°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL279	TF		356.76° (354.93°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL281	TF		345.33° (343.50°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL283	TF		333.90° (332.06°)		-FL090	+7000.00	-210.00	3.88		RNAV 1
BL285	TF		238.17° (236.34°)				-180.00	12.50		RNAV 1
BL270	TF		238.17° (236.34°)		-7000	+6000	-180.00	7.00		RNAV 1

GUNIM 7Q

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
GUNIM	IF		-		-	-	-	-	-	RNAV 1
OLNUR	TF		120.14° (118.31°)		-	-	-	38.06	-	RNAV 1
BL806	TF		120.28° (118.44°)		-	-	-	40.24	-	RNAV 1
ATPUK	TF		120.40° (118.57°)		-	+FL150	-210.00	36.74	-	RNAV 1
DUBEL	TF		68.26° (66.42°)		-	+FL140	-210.00	20.97	-	RNAV 1
APERU	TF		92.28° (90.45°)		-	-	-	4.64	-	RNAV 1
BL272	TF		92.28° (90.45°)			+FL110	-210	10.28		RNAV 1
BL274	TF		68.79° (66.96°)		-FL130	+FL110	-210	14.36		RNAV 1
BL276	TF		92.42° (90.59°)		-FL130	+FL110	-210	6.86		RNAV 1
BL278	TF		148.17° (146.34°)		-FL130	+FL110	-210	4.50		RNAV 1
BL280	TF		162.46° (160.63°)		-FL130	+FL110	-210	4.50		RNAV 1
BL282	TF		176.87° (175.04°)		-FL130	+FL110	-210	4.50		RNAV 1
BL284	TF		191.23° (189.40°)		-FL130	+FL110	-210	3.20		RNAV 1
BL286	TF		284.34° (282.50°)				-180.00	10.89		RNAV 1
BL270	TF		284.34° (282.50°)		-7000	+6000	-180.00	7.00		RNAV 1

SUSIK 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
SUSIK	IF		-		-	-	-	-	-	RNAV 1
GOMIL	TF		104.96° (103.13°)		-	-	-	48.58	-	RNAV 1
BL805	TF		149.41° (147.58°)		-	-	-	14.26	-	RNAV 1
BL704	TF		149.45° (147.62°)		-	-	-	15.63	-	RNAV 1
RIGBA	TF		149.48° (147.65°)		-	-	-	14.91	-	RNAV 1
DUBEL	TF		145.34° (143.51°)		-	+FL140	-210.00	20.34	-	RNAV 1
APERU	TF		92.28° (90.45°)		-	-	-	4.64	-	RNAV 1
BL272	TF		92.28° (90.45°)			+FL110	-210.00	10.28		RNAV 1
BL274	TF		68.79° (66.96°)		-FL130	+FL110	-210	14.36		RNAV 1

BL276	TF		92.42° (90.59°)		-FL130	+FL110	-210	6.86		RNAV 1
BL278	TF		148.17° (146.34°)		-FL130	+FL110	-210	4.50		RNAV 1
BL280	TF		162.46° (160.63°)		-FL130	+FL110	-210	4.50		RNAV 1
BL282	TF		176.87° (175.04°)		-FL130	+FL110	-210	4.50		RNAV 1
BL284	TF		191.23° (189.40°)		-FL130	+FL110	-210	3.20		RNAV 1
BL286	TF		284.34° (282.50°)				-180.00	10.89		RNAV 1
BL270	TF		284.34° (282.50°)		-7000	+6000	-180.00	7.00		RNAV 1

SUSIK 7Q

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
SUSIK	IF		-		-	-	-	-	-	RNAV 1
MAKAM	TF		129.79° (127.96°)		-	-	-	56.18	-	RNAV 1
BL704	TF		96.96° (95.12°)		-	-	-	19.13	-	RNAV 1
RIGBA	TF		149.48° (147.65°)		-	-	-	14.91	-	RNAV 1
DUBEL	TF		145.34° (143.51°)		-	+FL140	-210.00	20.34	-	RNAV 1
APERU	TF		92.28° (90.45°)		-	-		4.64	-	RNAV 1
BL272	TF		92.28° (90.45°)			+FL110	-210	10.28		RNAV 1
BL274	TF		68.79° (66.96°)		-FL130	+FL110	-210	14.36		RNAV 1
BL276	TF		92.42° (90.59°)		-FL130	+FL110	-210	6.86		RNAV 1
BL278	TF		148.17° (146.34°)		-FL130	+FL110	-210	4.50		RNAV 1
BL280	TF		162.46° (160.63°)		-FL130	+FL110	-210	4.50		RNAV 1
BL282	TF		176.87° (175.04°)		-FL130	+FL110	-210	4.50		RNAV 1
BL284	TF		191.23° (189.40°)		-FL130	+FL110	-210	3.20		RNAV 1
BL286	TF		284.34° (282.50°)				-180.00	10.89		RNAV 1
BL270	TF		284.34° (282.50°)		-7000	+6000	-180.00	7.00		RNAV 1

RIKBU 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
RIKBU	IF		-		-	-	-	-	-	RNAV 1
GOMIL	TF	-	149.48° (147.65°)		-	-	-	67.09	-	RNAV 1
BL805	TF		149.41° (147.58°)		-	-	-	14.26	-	RNAV 1
BL704	TF		149.45° (147.62°)		-	-	-	15.63	-	RNAV 1
RIGBA	TF		149.48° (147.65°)		-	-	-	14.91	-	RNAV 1
DUBEL	TF		145.34° (143.51°)		-	+FL140	-210.00	20.34	-	RNAV 1
APERU	TF		92.28° (90.45°)		-	-	-	4.64	-	RNAV 1
BL272	TF		92.28° (90.45°)			+FL110	-210	10.28		RNAV 1
BL274	TF		68.79° (66.96°)		-FL130	+FL110	-210	14.36		RNAV 1
BL276	TF		92.42° (90.59°)		-FL130	+FL110	-210	6.86		RNAV 1
BL278	TF		148.17° (146.34°)		-FL130	+FL110	-210	4.50		RNAV 1
BL280	TF		162.46° (160.63°)		-FL130	+FL110	-210	4.50		RNAV 1
BL282	TF		176.87° (175.04°)		-FL130	+FL110	-210	4.50		RNAV 1
BL284	TF		191.23° (189.40°)		-FL130	+FL110	-210	3.20		RNAV 1
BL286	TF		284.34° (282.50°)				-180.00	10.89		RNAV 1
BL270	TF		284.34° (282.50°)		-7000	+6000	-180.00	7.00		RNAV 1

XIVIL 7P

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST	VA	Navigation Specification
			°M(°T)		ft	ft	kt	NM	°	
XIVIL	IF						-210.00			RNAV 1
BEMSO	TF		267.66° (265.83°)			+FL140	-210.00	26.56		RNAV 1

TERMINAL HOLDINGS

Waypoint Identifier	Path Descriptor	Fly over	Course Angle	Turn Direction	Upper Limit Altitude	Lower Limit Altitude	Speed Limit	TM DST TIME	VA	Navigation Specification
			°M(°T)			ft	kt	NM MIN	°	
TELUV	HM	Y	206.87° (205.04°)	L	-FL240	+FL150	-210.00	1 MIN	-	RNAV 1
BEMSO	HM	Y	273.00° (271.17°)	R	-FL180	+FL140	-210.00	1 MIN	-	RNAV 1
RURPA	HM	Y	183.60° (181.76°)	L	-FL240	+FL120	-210.00	10NM	-	RNAV 1
GURBI	HM	Y	340.20° (338.37°)	R	-FL240	+FL120	-230.00	1 MIN	-	RNAV 1
MUGPA	HM	Y	24.09° (22.25°)	R	-FL240	+FL120	-230.00	1 MIN	-	RNAV 1

BL807	HM	Y	87.10° (85.26°)	L	-FL240	+FL150	-230.00	1 MIN	-	RNAV 1
BL805	HM	Y	149.41° (147.58°)	R	-FL240	+FL150	-230.00	1 MIN	-	RNAV 1
RIGBA	HM	Y	149.48° (147.65°)	L	-FL240	+FL120	-230.00	1 MIN	-	RNAV 1
ATPUK	HM	Y	87.23° (85.40°)	L	-FL240	+FL150	-230.00	1 MIN	-	RNAV 1
BL272	HM	Y	92.28° (90.45°)	L		+FL110	-210.00	10NM	-	RNAV 1

WAYPOINT INFORMATION POINT MERGE SYSTEM STAR RWY 27L/27R (VOBL)

WAYPOINT IDENTIFIER	WGS84 COORDINATES
TELUV	N 14:09:42.00E 78:11:13.00
RURPA	N 13:39:44.93E 77:56:52.57
XIVIL	N 13:17:39.68E 78:55:04.01
BEMSO	N 13:15:41.74E 78:27:54.39
LEKAP	N 12:05:05.30E 79:35:54.80
BL809	N 12:43:25.10E 78:11:11.33
GURBI	N 12:51:54.53E 77:52:13.75
BL557	N 13:06:19.16E 77:51:45.88
BL558	N 13:06:16.35E 77:59:15.54
ADKAL	N 11:50:54.00E 78:16:49.00
BL810	N 12:35:13.40E 77:58:58.46
UGABA	N 12:08:59.14E 77:17:29.41
MUGPA	N 12:35:13.13E 77:28:23.87
RUBOX	N 12:53:49.00E 77:36:09.31
BL556	N 13:06:23.46E 77:41:25.33
PEXEG	N 13:04:15.10E 76:02:30.20
BL807	N 13:07:25.62E 76:41:00.20
ATPUK	N 13:10:14.15E 77:16:05.08
GUNIM	N 14:05:08.30E 75:32:08.50
OLNUR	N 13:47:03.12E 76:06:36.92
BL806	N 13:27:50.84E 76:42:58.39
DUBEL	N 13:18:40.35E 77:35:47.05
APERU	N 13:18:38.22E 77:40:32.72
SUSIK	N 14:24:04.60E 76:09:56.30
GOMIL	N 14:13:04.78E 76:58:41.16
BL805	N 14:00:59.73E 77:06:33.26
BL704	N 13:47:44.47E 77:15:09.92
RIGBA	N 13:35:05.36E 77:23:22.01
MAKAM	N 13:49:26.63E 76:55:34.73
BL276	N 13:24:07.11E 78:11:40.81
BL278	N 13:20:21.37E 78:14:14.30
BL280	N 13:16:05.58E 78:15:46.13
BL282	N 13:11:35.41E 78:16:10.08
BL284	N 13:08:24.98E 78:15:37.92
BL270	N 13:12:17.72E 77:57:43.76
BL272	N 13:18:33.14E 77:51:05.36
BL274	N 13:24:11.46E 78:04:38.84
BL271	N 13:04:55.25E 78:07:24.31
BL273	N 13:04:54.36E 78:16:14.26
BL275	N 13:08:12.66E 78:17:16.64
BL277	N 13:12:05.25E 78:17:43.10
BL279	N 13:15:58.38E 78:17:21.99
BL281	N 13:19:42.78E 78:16:14.11
BL283	N 13:23:09.58E 78:14:22.10
BL286	N 13:10:46.79E 78:04:44.18
BL285	N 13:16:11.85E 78:03:41.97
RIKBU	N 15:09:57.00E 76:21:34.00